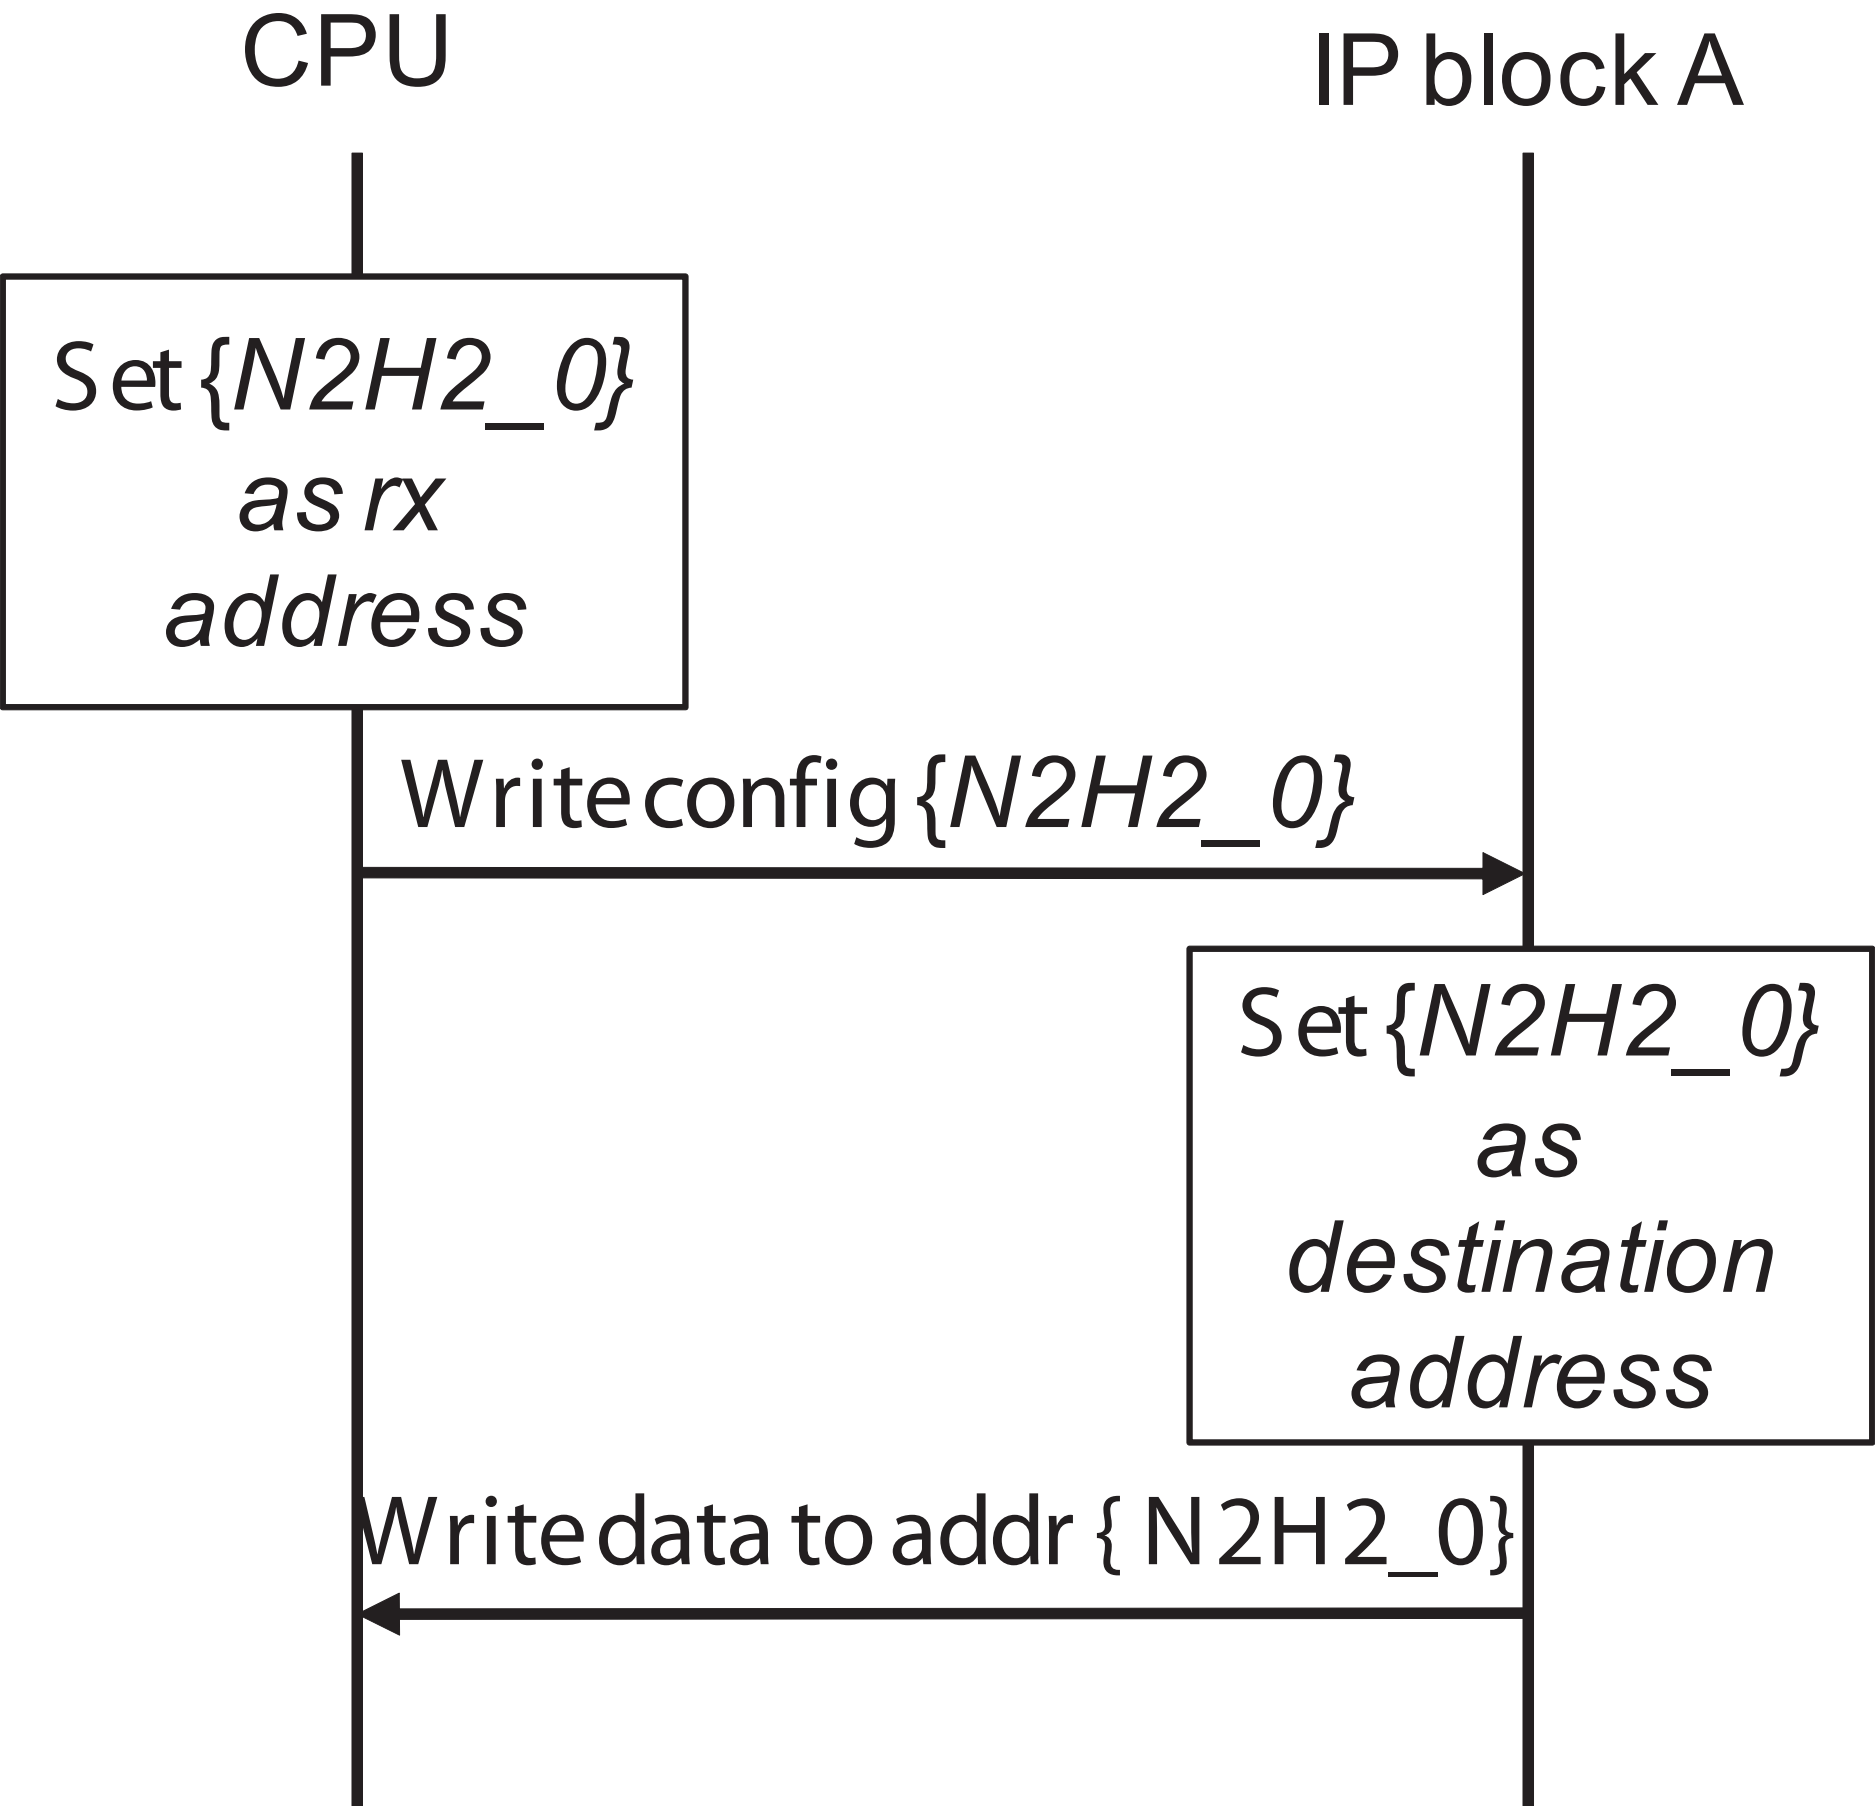
CPU
IP block A
Set {N2H2_0} as rx address
Write config {N2H2_0}
Set {N2H2_0} as destination address
Write data to addr { N2H2_0}