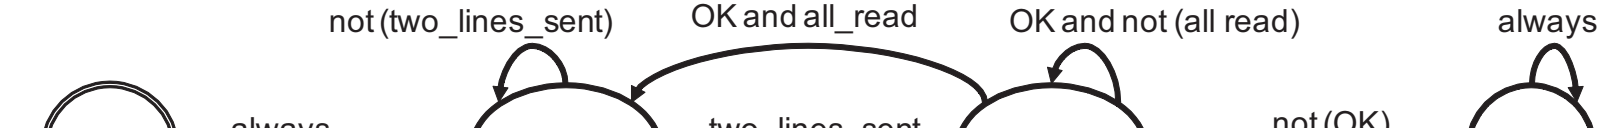
not (two_lines_sent)
OK and all_read
OK and not (all read)
always
start
always
send_lines
two_lines_sent
verify_result
not (OK)
done
Write the destination address
Send test data to ”XOR”-IP block
Read the results
Do nothing